Ziegler &Brown

PORTABLE GRILL
THE TAKE ANYWHERE BBQ

FOLDING CART ASSEMBLY INSTRUCTIONS

Barbeque sold separately

Cart Code: ZG1GCARTK

Suits: ZG1GLEK, ZG1GK, ZG1GRK, ZGTGLEK, ZGTGK, ZGTGRK, ZGTGNGK, ZGTGRNGK.

For use with Ziegler & Brown Portable Grill and Twin Grill

CONTENTS

	PAGE NO.
Safety instructions	3
Unpacking and unfolding the cart	4
Locking the cart folded for transport or storage	5
Fitting the Ziegler & Brown Portable Grill onto the cart	5
Fitting the Ziegler & Brown Twin Grill onto the cart	6
Fitting the gas cylinder	6
Using the cart to move your barbeque	7
Optional accessories and parts storage	8
PARTS LIST	10

IMPORTANT SAFETY INSTRUCTIONS

This cart is specifically for use only with Ziegler & Brown Portable Grill or Ziegler & Brown Twin Grill.

Follow all instructions in the manual that comes with the barbeque for safe assembly and operation of the barbeque.

Contact Barbeques Galore on 1300 301 392 if you need a replacement manual for your barbeque.

Need More Information?

You can call your local Barbeques Galore store where barbeque experts will be happy to help you.

Phone 1 300 301 392

Or visit us online at: www.barbequesgalore.com.au

Barbeques Galore G.L.G. Australia Pty Ltd (ACN 001 185 002).
Building A2, Campus Business Park, 350-374 Parramatta Road.
Homebush NSW 2140AUSTRALIA Ph. 02 9735 4111

Unpacking and unfolding the cart

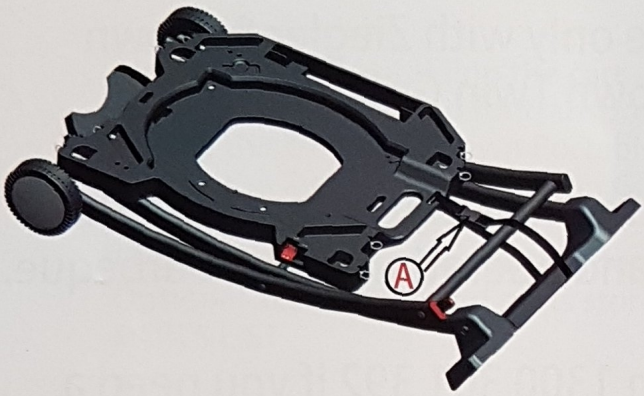

Step 1

Carefully take out the cart from its carton.
Release the buckle Ⓐ on the strap as shown.

Step 2

With one foot on the bottom brace Ⓑ hold and lift the handle Ⓒ to carefully unfold the cart.

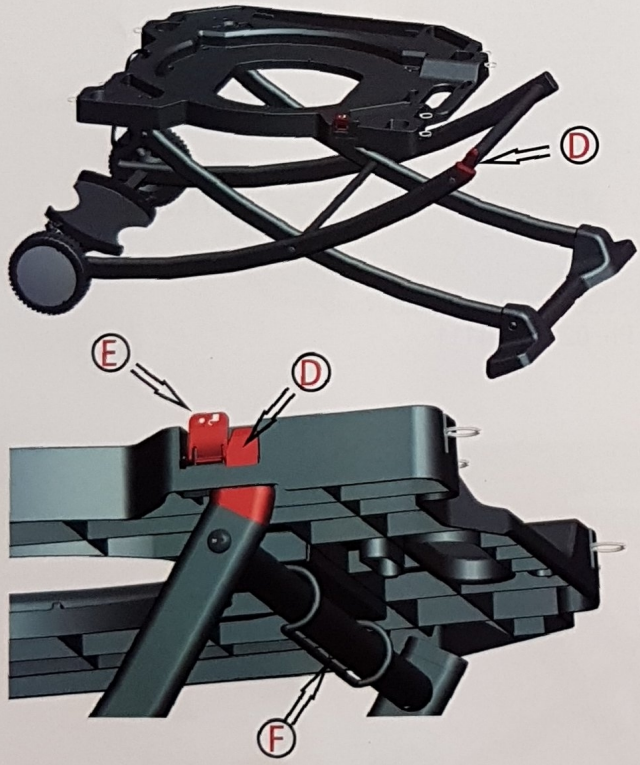

Step 3

Guide the leg top latch Ⓓ into the table top as shown. Check the hook Ⓕ is properly engaged onto the crossbar as shown.
Press the small red lock Ⓔ downwards to lock the table top onto the leg.
To fold the cart start with one foot on the bottom brace, lift the small red lock Ⓔ, then lift the table slightly by the handle Ⓒ to disengage the leg top latch Ⓓ, carefully lower the cart flat and lock the strap again with the buckle Ⓐ.

Locking the cart folded for transport or storage

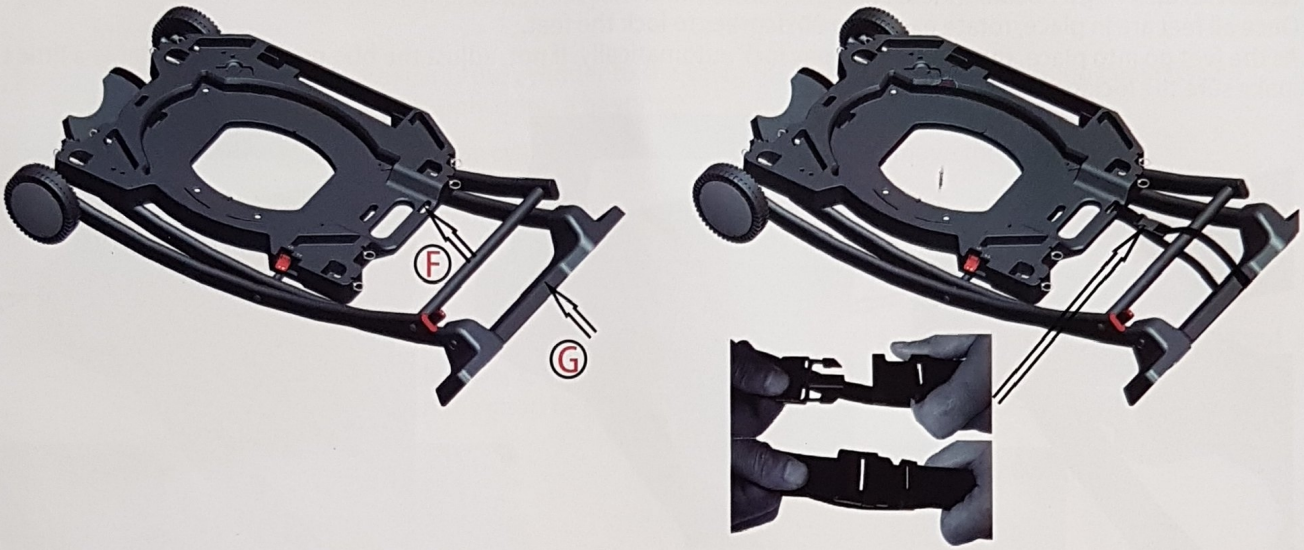

One end of the strap goes through the small hole Ⓕ on table as shown. The other end goes around the bottom brace Ⓖ. Lock the two buckle ends together and tighten the strap to secure.

Fitting the Ziegler & Brown Portable Grill onto the cart

Remove the rubber feet from the bbq, store them in a safe place for later use.
Pull the ring near the "D" shaped well on the table outwards as shown. Rotate the ring 90 degrees to hold it unlocked.
Repeat for all 4 rings. Position the Ziegler & Brown Portable Grill onto the cart.
Once all feet are in place, rotate each ring 90 degrees to lock the feet.
As the feet go into place, the spring pins may lock automatically. If not, adjust the bbq position on the table a little to make sure the locking pins engage properly.

Follow all instructions in your bbq manual on connecting the gas, leak testing, safe use and operation.

Fitting the Ziegler & Brown Twin Grill onto the cart

Pull the ring near the rectangular shaped well on the table outwards as shown. Rotate the ring 90 degrees to hold it unlocked.
Repeat for all 4 rings. Position the Ziegler & Brown Twin Grill onto the cart.
Once all feet are in place, rotate each ring 90 degrees to lock the feet.
As the feet go into place, the spring pins may lock automatically. If not, adjust the bbq position on the table a little to make sure the locking pins engage properly.

Follow all the instructions in your bbq manual on connecting the gas, leak testing, safe use and operation.

Fitting the gas cylinder

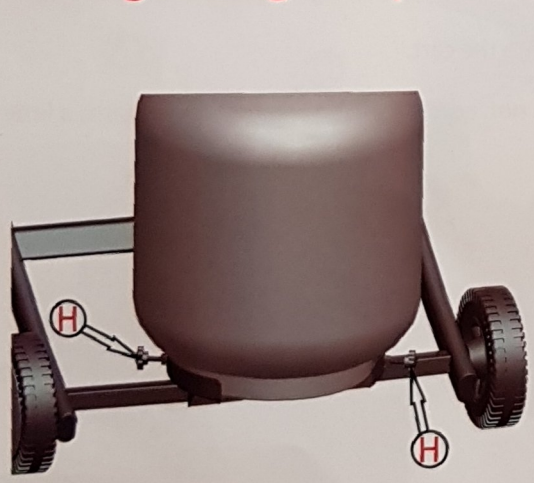

How to Fit Gas Cylinder
Loosen the two wing nuts Ⓗ first then place the cylinder into the cylinder base. Tighten the wing nuts to hold the cylinder firmly. One end of the strap goes through the small hole in Ⓘ the table as shown. The other end goes around the cylinder handle. Lock the two buckle ends together and tighten the strap to secure.

Using the cart to move your barbeque

Step 1 : Ensure the gas supply is turned OFF.

Step 1 : Disconnect the hose and regulator at the cylinder.(or at the bayonet if connected to a reticulated supply using a bayonet.)

Step 2 : Unbuckle the strap that secures the cylinder to the cart. (or disconnect the restraining chain used if connected to a reticulated supply using a bayonet)

Step 3 : Release the wing nuts that fix the cylinder to the cylinder base and remove the cylinder *.

Step 4 : Check that the bbq is safety secured into the cart by the spring pins.

Step 5 : Lift the small lock Ⓔ as shown.

Step 6 : With one foot on the bottom brace Ⓑ, carefully lift the table by the handle Ⓒ as shown to disengaged the leg top latch Ⓓ Carefully lower the cart until flat. Lock the cart down with the locking strap shown using the buckle Ⓐ . Tighten the strap to secure.

Step 7 : Use the bottom brace as a handle to move the cart as shown.

* Ensure that the gas cylinder is kept upright, cool and well ventilated when transported.

The cart can store optional accessories and parts as below:

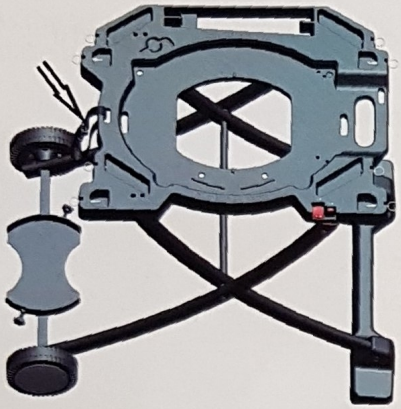

1 Strap(included with cart)

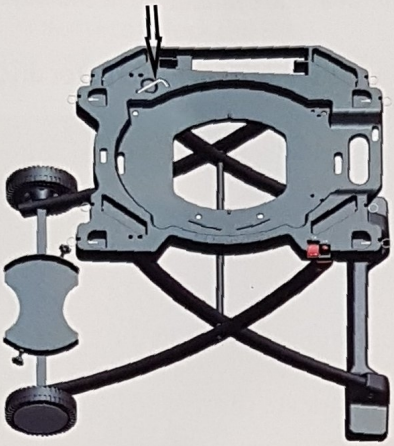

2 Allen key(included with the bbq)

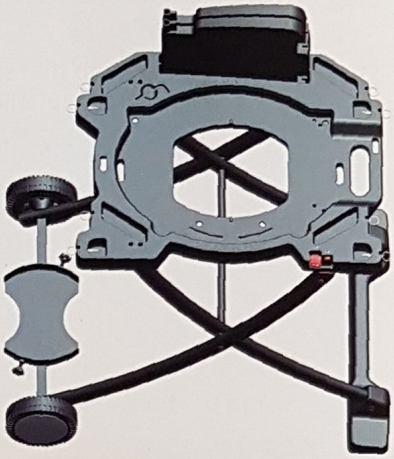

3 Portable Grill side shelves

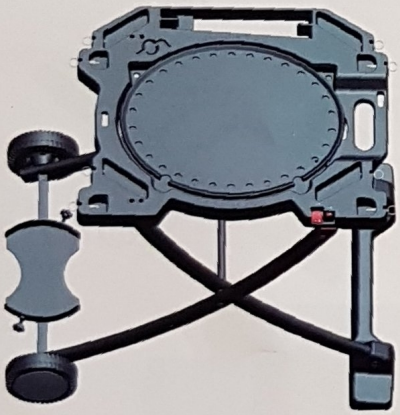

4 Portable Grill full hotplate

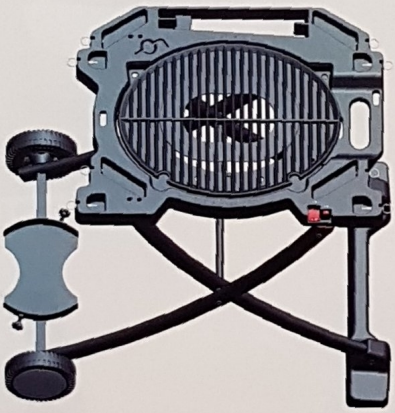

5 Portable Grill full grill

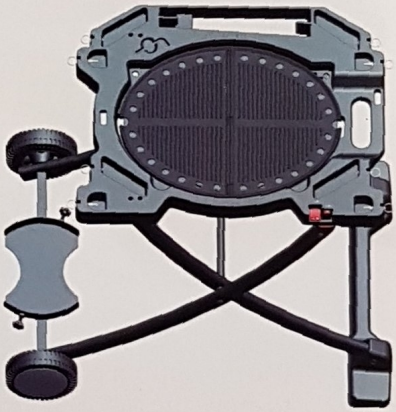

6 Portable Grill two half hotplates or grill

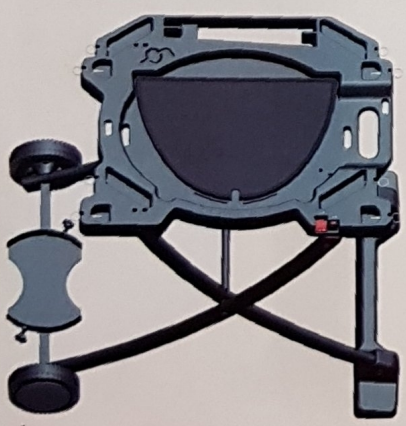

7 Twin Grill half hotplate or grill

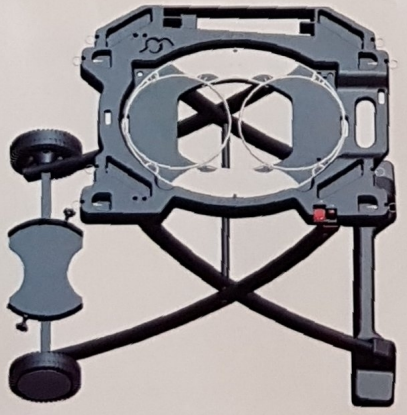

8 Portable Grill stainless steel trivet

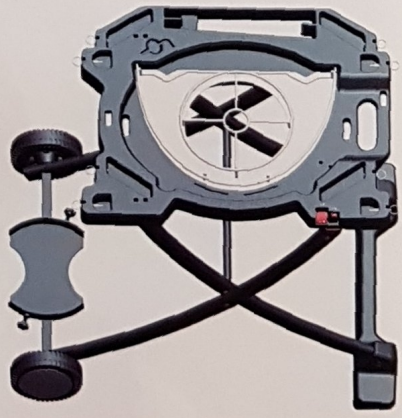

9 Twin Grill stainless steel trivet

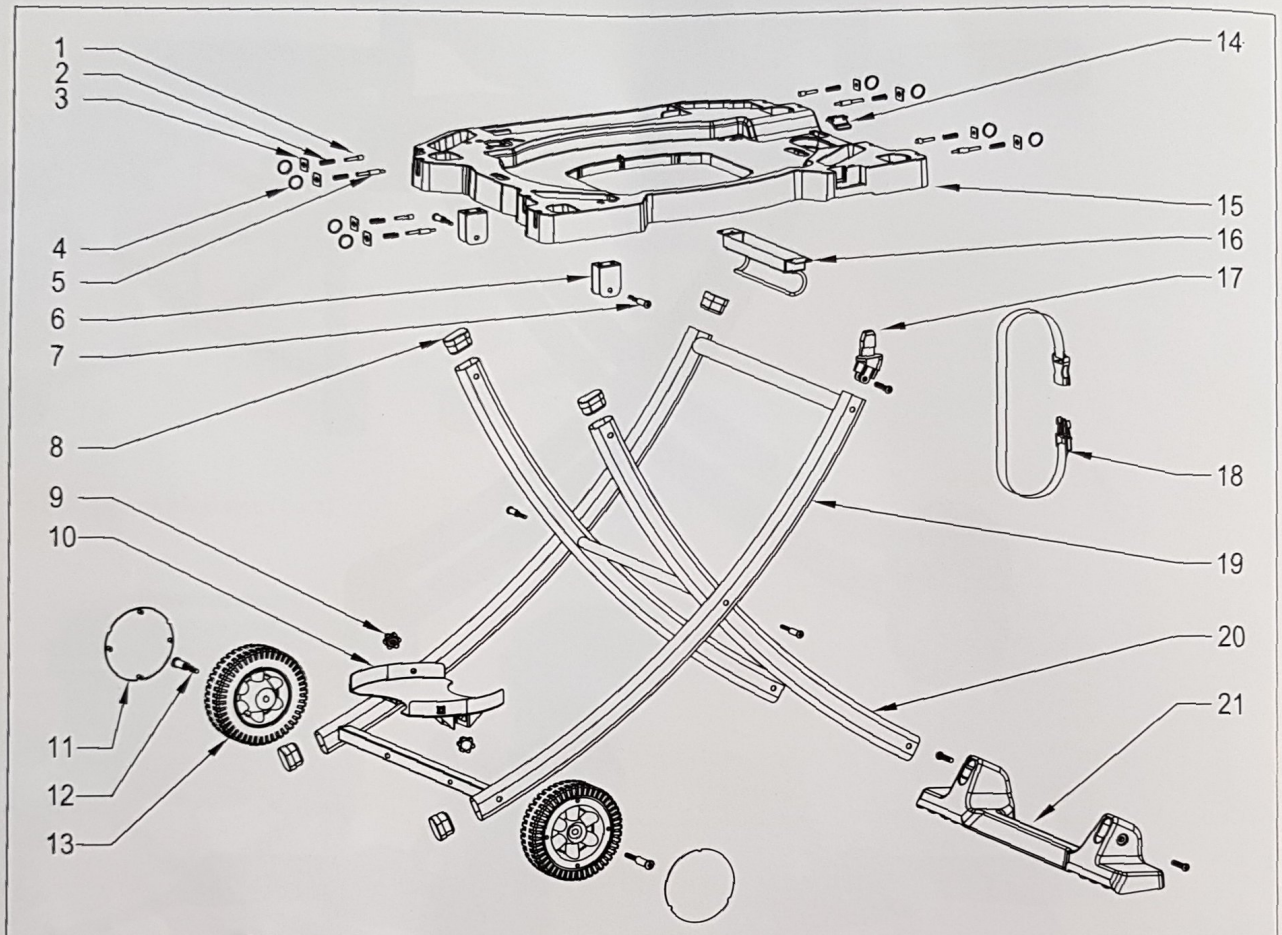

1	CP9095700	Short Spring pin	12	CP9095711	Axle
2	CP9095701	Spring	13	CP9095712	Wheel
3	CP9095702	Spring Fixing Plate	14	CP9095713	Lock
4	CP9095703	Ring	15	CP9095714	Cart Table
5	CP9095704	Long Spring Pin	16	CP9095715	Hook Assembly
6	CP9095705	Left tube "U" Bracket	17	CP9095716	Leg Top Latch
7	CP9095706	Left tube "U" Bracket Pin	18	CP9095717	Locking Strap
8	CP9095707	Tube Cap	19	CP9095718	Outer Tube
9	CP9095708	Wing Nut	20	CP9095719	Inner Tube
10	CP9095709	Cylinder Base	21	CP9095720	Bottom Brace
11	CP9095710	Hub Cap			